

Please type a plus sign (+) inside this box → ☐

PTO/SB/05 (4/98)  
Approved for use through 09/30/2000. OMB 0651-0032  
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

<b>UTILITY PATENT APPLICATION TRANSMITTAL</b> (Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))	Attorney Docket No.	DB000858-000
	First Inventor or Application Identifier	Shane Ching-Feng Hu
	Title	APPARATUS FOR DETECTING MIXED INTERLACED AND PROGRESSIVE ORIGINAL SOURCES IN A VIDEO SEQUENCE
	Express Mail Label No.	EJ116542829US

<b>APPLICATION ELEMENTS</b> See MPEP chapter 600 concerning utility patent application contents.	<b>ADDRESS TO:</b> Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) (Submit an original and a duplicate for fee processing)	5. <input type="checkbox"/> Microfiche Computer Program (Appendix)
2. <input checked="" type="checkbox"/> Specification [Total Pages 17] (preferred arrangement set forth below) - Descriptive title of the Invention - Cross References to Related Applications - Statement Regarding Fed sponsored R & D - Reference to Microfiche Appendix - Background of the Invention - Brief Summary of the Invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure	6. <input type="checkbox"/> Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies
3. <input checked="" type="checkbox"/> Drawing(s) (35 U.S.C. 113) [Total Sheets 2]	<b>ACCOMPANYING APPLICATION PARTS</b> 7. <input type="checkbox"/> Assignment Papers (cover sheet & document(s)) 8. <input type="checkbox"/> 37 C.F.R. § 3.73(b) Statement of Attorney (when there is an assignee) 9. <input type="checkbox"/> English Translation Document (if applicable) 10. <input checked="" type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input checked="" type="checkbox"/> Copies of IDS Citations 11. <input type="checkbox"/> Preliminary Amendment 12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) (Should be specifically itemized) 13. <input type="checkbox"/> * Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired (PTO/SB/09-12) 14. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed) 15. <input checked="" type="checkbox"/> Other: Information Disclosure Statement
4. Oath or Declaration [Total Pages 2] a. <input checked="" type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) (for continuation/divisional with Box 16 completed) i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).	

**NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).**

16. If a **CONTINUING APPLICATION**, check appropriate box, and supply the requisite information below and in a preliminary amendment:  
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: \_\_\_\_\_  
 Prior application information. Examiner \_\_\_\_\_ Group / Art Unit: \_\_\_\_\_  
**For CONTINUATION or DIVISIONAL APPS only:** The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

**17. CORRESPONDENCE ADDRESS**

☐ Customer Number or Bar Code Label (Insert Customer No. or Attach bar code label here) or ☒ Correspondence address below

Name	Edward L. Pencoske, Esq.				
	Thorp Reed & Armstrong, LLP				
Address	One Riverfront Center				
City	Pittsburgh	State	PA	Zip Code	15222-4895
Country	U.S.A.	Telephone	412/394-7789	Fax	412/394-2555

Name (Print/Type)	Edward L. Pencoske	Registration No. (Attorney/Agent)	29,688
Signature	<i>E L Pencoske</i>	Date	31 August 2000

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

Number: EJ116542829US  
Date of Deposit: August 31, 2000

I hereby certify that this paper or fee is being  
deposited with the United States Postal Service  
under 37 C.F.R. 1.10 on the date indicated above  
and is addressed to the Commissioner of Patents  
and Trademarks, Washington, D.C. 20231

THORP, REED & ARMSTRONG, LLP  
One Riverfront Center  
Pittsburgh, PA 15222-4895

*Suzanne Horvack*

**PATENT**

**Attorney Docket No.: DB000858-000**

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

**Applicant:** Shane Ching-Feng Hu )  
Serial No.: Not Yet Assigned )  
**Filed:** 31 August 2000 )  
**Entitled:** APPARATUS FOR DETECTING MIXED INTERLACED AND PROGRESSIVE  
ORIGINAL SOURCES IN A VIDEO SEQUENCE

**TRANSMITTAL FOR PATENT APPLICATION**

**To:** Assistant Commissioner for Patents  
Box PATENT APPLICATION  
Washington, D.C. 20231

Dear Sir:

Enclosed for filing is the above-referenced patent application. Transmitted herewith for filing  
are:

1. Utility Patent Application Transmittal (Form PTO/SB/05);
2. Fee Transmittal (Form PTO/SB/17) and a check in the amount of \$1,968.00;
3. Seventeen (17) pages of specification including seventy-eight (78) claims;
4. Two (2) sheets of figures including four (4) informal drawings;
5. Declaration for Utility or Design Patent Application (PTO/SB/01);
6. Information Disclosure Statement; and
7. Information Disclosure Statement by Applicant (PTO/SB/08A).

Also enclosed is a return postcard. Please date stamp the postcard and return it to us to acknowledge receipt of this patent application.

The Commissioner is hereby authorized to charge any underpayment or credit any overpayment to our Deposit Account No. 20-0888. A duplicate copy of this Transmittal letter is enclosed.

Respectfully submitted,



Edward L. Pencoske

Reg. No. 29,688

THORP REED & ARMSTRONG, LLP

One Riverfront Center, 7<sup>th</sup> Floor

Pittsburgh, PA 15222-4895

(412) 394-7789

Dated: 31 August 2000  
00252481

Attorneys for Applicant

# **Apparatus for Detecting Mixed Interlaced and Progressive Original Sources in a Video Sequence**

5

## **Background of the Invention**

### Field of the Invention

10       The present invention is related to the field of video signal processing and, more particularly, to methods and apparatus for identifying whether a video signal originated by means of a film source or a video camera source.

### Description of the Background

15       Film and television image generation systems give rise to the appearance to the viewer of continuously moving visual images. Actually, the appearance of continuous motion results from visual and mental integration by the viewer of rapidly advancing sequences of still frame images.

20       Conventionally, in countries having a 60 hertz power grid, motion picture films are generated and are projected at one frame rate, such as 24 film frames per second, while television images are generated and displayed at another frame rate, such as 30 television frames per second.

25       Each individual frame is made up of fields. The fields are typically produced in one of two ways. The fields may be interlaced, i.e. one field being made up of even numbered lines and the other field being made up of odd numbered lines, or the fields may be progressive, i.e. one line scanned after another. For example, in the standard NTSC format used for television, the 30 frames per second are comprised of 60 interlaced fields per second, or more precisely 59.94 fields per second within the NTSC color standard signal format.

30       A video sequence may contain a mixture of interlaced video and converted progressive film material. The film material is typically sampled at 24 hertz while video is sampled at different rates: 59.94 hertz for the NTSC standard, and 50 hertz for the D1-525 and D1-625 standards. A telecine, a device for scanning and converting film into video, must maintain a proper sequence duration between the different frame rates. To do so, either a 3/2 or 2/2 pull-down technique is used to stretch the display period of film frames to the target video standard. In the 3/2 pull-down process, one film frame is used to produce three video  
35       fields, and the next film frame is used to produce two fields, in a repeating 3/2 pattern. Thus,

the 3/2 pull-down is used to convert two film frames into five video fields for the D1-525 video standard. In the 2/2 pull-down system, each film frame generates two video fields, one of each type (odd/even).

When receiving video information that was originally produced on film, there is an opportunity for performing essentially error-free de-interlacing of the signal. That is because each frame of the film source is used in generating at least two video fields, representing both types (odd/even) of interlaced fields. Therefore, if a video signal can be reliably determined to have originated on film, and the video fields corresponding to a common film frame can be identified, an essentially error-free non-interlaced video frame corresponding to a single instant in time can be generated by merging the two fields. Other uses of film source identification include identification of redundant fields (which occur in 3/2 pull-down sources) to be deleted in digital transmission systems for improving channel efficiency. Also, to display video in a progressive monitor, each field needs to be interpolated vertically to the full frame size. For the film-source video, the best way to de-interlace is to merge the two fields back together to reconstruct the original progressive film frame and discard any extra repeated field.

Unfortunately, no special information is included in broadcast or other video signals to indicate which fields may have originated on film and which fields may have originated in a video camera, so the presence of film-based material must be inferred by examining differences between the luminance information of fields. That, however, can present a number of problems. For example, a strong similarity between successive video fields could indicate that they were generated from the same film frame; it could also be due to a lack of movement in the program material. Likewise, a difference between fields may indicate that the fields did not come from the same frame of information, but the difference could also be due to vertical spatial detail or transmission noise. A practical film detector must therefore distinguish between the foregoing situations.

U.S. Patent No. 5,689,301 discloses a method of film mode identification which comprises concurrently providing a first pixel from a given field and second and third vertically aligned pixels of the same horizontal position from a temporally adjacent field.

The values of the pixels are compared to produce for each first pixel, a pixel difference signal having a value of zero if the value of the first pixel is intermediate the values of the second and third pixels. Otherwise, the difference signal has a value equal to the absolute value of the difference between the value of the first pixel and the value of one of the second and third pixels having a value closest to that of the first pixel. Non-zero values of the pixel difference

signals are accumulated over a predetermined portion of one field period of the video signal to provide a field difference signal. The accumulated values are then analyzed for a pattern indicative of a film source of the video signal.

Despite advances in the field of identifying original film sources, the need exists for a practical detector which can correctly detect the occurrences of film sources in video sequences, which may contain an arbitrary mix of interlaced and progressive sources.

### **Summary of the Present Invention**

The present invention is directed to a method and apparatus of identifying the source of materials in a video sequence. A series of pseudo frames is formed, for example by interleaving, from fields in adjacent frames. A correlation value is calculated for each of the pseudo frames. The correlation value may be a sum of absolute difference (SAD) of luminance values of every neighboring scan line accumulated over the entire pseudo frame. Scene changes may be determined, for example, based on the correlation values. Frames and repeated fields are identified based on the correlation values and the scene changes. Finally, the source of each frame in the series is identified based on the identification of frames and repeated fields.

The apparatus and method of the present invention detect whether each field in a video sequence is of video (interlaced) or film (progressive) origin, and whether the field is a repeated field of the previous progressive frame. It also determines whether the field is a starting field for a new scene in the video sequence. Such information is useful for data transmission and display purposes. Those, and other advantages and benefits, will become apparent from the description of the preferred embodiment hereinbelow.

### **Brief Description of the Drawings**

For the Present invention to be readily understood and easily practiced, the present invention will now be described, for purposes of illustration and not limitation, in conjunction with the following figures wherein:

FIG. 1 is a block diagram of an apparatus for determining the source of video sequences constructed according to the present invention;

FIG. 2 is a diagram illustrating the states of a state machine used to implement certain of the functions of the analyzer of FIG. 1;

FIG. 3 is a flow chart illustrating a method for determining the source of video sequences according to the present invention; and

FIG. 4 illustrates a system upon which the method of the present invention may be practiced.

5

### Description of the Preferred Embodiments

FIG. 1 is a block diagram of a detection apparatus 10 constructed according to the present invention for determining the source of video sequences. An external source 12 of video sequences of unknown origin provides a video sequence to the detection apparatus 10. External source 10 conforms to standard industry interfaces and provides input video sequences which may consist of an arbitrary mix of video and film source origin. The detection apparatus 10 may be operated in real time, in which case detection is done on the fly, or operated off-line.

The detection apparatus 10 is comprised of a field delay FIFO buffer 14 with a capacity of N fields. The buffer 14 typically has a minimum value for N of 4. However, if time and space are of no concern, i.e., offline non real-time systems, longer delay can be incorporated to provide more robust detection. The buffer 14 serves as a look ahead buffer for the intra-frame correlation measurements discussed next.

A circuit 16 interleaves each field with the previous field to form a pseudo frame. An intra-frame correlation (SAD) is calculated by the circuit 16 for the pseudo-frame as follows.

$$SAD = \sum_{i=0}^{Y-2} \sum_{j=0}^{X-1} |P_{ij} - P_{i+1,j}|$$

where SAD is the sum of absolute value of neighboring line differences, Y is the total number of lines in the pseudo frame, X is the total number of pixels in a line,  $P_{ij}$  is the luminance value of a pixel. The sum of the differences is a commonly used measure of correlation. Other measures can be used, including a higher power of this measure.

A circuit 18 is responsive to the intra-frame correlation SAD values. When the intra-frame correlation SAD value is higher than the previous SAD value multiplied by a pre-determined constant, a scene change is declared for the current input field. Thus:

If(SAD[1]>(SAD[2] \* K))

5                   Scene\_change[1] = TRUE;

else

                  Scene\_change[1] = FALSE;

where K is a pre-determined constant. The scene change status is recorded along with the SAD value in a buffer 20.

10           The buffer 20 may have a capacity of N+M states, and is synchronized with the shifting of the fields within the FIFO buffer 14. The extra M states of buffering for the SAD values are required by an analyzer 22 to handle scene changes. The value of M may equal N - 1.

5           The analyzer 22 is responsive to the buffer 20. For a pseudo frame having progressive characteristics, the intra-frame SAD has a much lower value than a pseudo frame of either interlaced origin or a pseudo frame that straddles two progressive frames. That fact forms the basis for the discrimination between interlaced and progressive source videos.

20           The FIFO buffer 14 provides the ability to look ahead, which is necessary for the beginning of a new scene and is also used for the continuation of a scene. Accordingly, the values of SAD[i] (i from N-1 to 1) that are used by the analyzer 22 for new scenes and for continuation of scenes are P1 = SAD[N-1], P2 = SAD[N-2], P3 = SAD[N-3]. The values {P1, P2, P3} are inputs to the analyzer 22.

25           For the tail end of a scene, the values of SAD[i], (i from N+1 to N+M) are used. The tail-end condition is met if there is any scene change status being "TRUE" for scene\_change[k], (k from 1 to N-1). In that case, P1 = SAD[N], P2 = SAD[N+1], P3 = SAD[N+2]. The values {P1, P2, P3} are inputs to the analyzer 22.

The analyzer 22 compares the values of P1, P2, and P3 as formulated above in accordance with, for example, the following equations:

If (Pi < (Pj \* Kframe))

30                   Is\_frame = TRUE;

else

                  Is\_frame = FALSE;

If (Pj < (Pk \* Kframe))

                  Is\_frame = TRUE;



else

Is\_frame = FALSE;

where “Kframe” is a pre-determined constant.

5

If ((Pi, Pk “is\_frame”) and (Pj, Pk “is\_frame”))

Is\_repeated\_field = TRUE;

else

Is\_repeated\_field = FALSE;

10

With the is\_frame and is\_repeated\_frame determinations made, the remainder of the functions of the analyzer 22 may be implemented with, for example, a state machine implementing the following state transition table:

Current state	Condition	Next State
Interlaced	{P1, P2} “is_frame” and {P3, P2} “is_frame”	Prog_2_1
	{P1, P2, P3} “is_repeated_field”	Prog_3_1
	None of the above	Interlaced
Prog_2_1	Already pre-determined	Prog_2_2
Prog_2_2	{P1, P2} “is_frame” and {P3, P2} “is_frame”	Prog_2_1
	{P1, P2, P3} “is_repeated_field”	Prog_3_1
	None of the above	Interlaced
Prog_3_1	Already pre-determined	Prog_3_2
Prog_3_2	Already pre-determined	Prog_3_3
Prog_3_3	{P1, P2} “is_frame” and {P3, P2} “is_frame”	Prog_2_1
	{P1, P2, P3} “is_repeated_field”	Prog_3_1
	None of the above	Interlaced

15

Where:

- Interlaced means an interlaced field;
- Prog\_2\_1 means the first field of a progressive frame;
- Prog\_2\_2 means the second field of a progressive frame;
- Prog\_3\_1 means the first field of a repeated field progressive frame;

20

- Prog\_3\_2 means the second field of a repeated field progressive frame; and
- Prog\_3\_3 means the third field of a repeated field progressive frame.

The state transitions shown in the previous table are graphically illustrated in FIG. 2

Returning to FIG. 1, synchronized with each field 24 output from the FIFO buffer 14,  
 5 the analyzer 22 determines the output field's 24 characteristics and outputs a flag based on the next state in the state transition table indicating whether the output field 24 is a starting field of a new scene and format of the field, i.e.:

- interlaced field (interlaced), or
- The first field of a progressive frame (Prog\_2\_1), or
- 10 • The second field of a progressive frame (Prog\_2\_2), or
- The first field of a repeated field progressive frame (Prog\_3\_1), or
- The second field of a repeated field progressive frame (Prog\_3\_2), or
- The third field of a repeated field progressive frame (Prog\_3\_3).

The detecting apparatus 10 starts to output video fields 24, and the flags associated  
 5 with each field, after the delay interposed by the FIFO buffer 14. Typical examples of video systems which can benefit from the information provided are progressive video display devices, MPEG2 video compressor, etc.

The present invention is also directed to a method of detecting mixed interlaced and  
 20 progressive original sources in a video sequence. The method of the present invention is illustrated in FIG. 3. The first step of the method 26 is to buffer incoming fields. Buffering of the incoming fields is needed to select the values P1, P2 and P3 later in the process, and is also needed to enable the interleaving, at step 28, of adjacent fields to provide a pseudo frame.

After the pseudo frames have been created, through interleaving at step 28 or  
 25 otherwise, an intra-frame correlation is calculated at step 30. One intra-frame correlation which may be used is based on the sum of absolute value of neighboring line differences as discussed above.

At step 32, scene changes are identified when the intra-frame correlation value is  
 higher than a previous intra-frame correlation value multiplied by a predetermined constant.  
 30 Other methods of determining when a scene changes may be used. However, because the intra-frame correlation values are available, using those values to determine scene changes is particularly advantageous.

Step 34 corresponds to the analyzer 22 of FIG. 1. In step 34, the intra-frame correlations are made available as well as the scene change information. Based on those two pieces of information, the values P1, P2 and P3 are selected and compared to one another. The basis of the comparison is a recognition that the intra-frame correlation for a pseudo frame is much lower than the intra-frame correlation of either an interlaced original or a pseudo frame that straddles two progressive frames. Based on that comparison a state machine may be used to determine the type of frame.

At step 36, frames, which are buffered at step 26, are output and synchronization with the output of information from step 34. Information may be output at step 34 in the form of flags that indicate whether the output field is a starting field of a new scene together with the format of the field.

The method of the present invention may be embodied in software and stored, for example, on a disc 38, on a computer's hard drive (not shown), or other computer readable media. The disc 38 may be used to control the operation of a computer system, such as system 40 illustrated in FIG. 4. System 40 may be comprised of a general purpose computer 42, a keyboard 44, mouse 46 and a monitor 48. Other types of input devices (scanners, microphones, etc.) and other types of output devices (speakers, printers, etc.) may be used depending upon the needs of the user. The computer 42 has a disc drive 50 for receiving the disc 38.

The present invention may also be implemented in a hardware specific implementation controlled by an application specific integrated circuit (ASIC) programmed to carry out the method as described above.

While the present invention has been described in conjunction with preferred embodiments thereof, those of ordinary skill in the art will recognize that many modifications and variations may be made. For example, other methods may be employed for creating pseudo fields. Additionally, other types of correlations may be used to generate intra-frame values for the pseudo frames. Depending upon the correlation used, the operation of the analyzer may need to be adjusted to correspond to the input information. All such modifications and variations are intended to be covered by the foregoing description and the following claims.

What is claimed is:

1. A method of identifying the source of materials in a video sequence, comprising:  
forming a series of pseudo frames from fields in adjacent frames;  
calculating a correlation value for each of said pseudo frames;  
determining scene changes; and  
analyzing said correlation values and said scene changes to identify the source of each frame in said series.

2. The method of claim 1 wherein said forming a series of pseudo-frames includes interleaving each field with a field from a previous frame.

3. The method of claim 1 wherein said forming a series of pseudo-frames includes interleaving each field with a previous field.

4. The method of claim 1 wherein calculating a correlation value includes calculating a sum of absolute values of neighboring line differences according to the following formula:

$$SAD = \sum_{i=0}^{Y-2} \sum_{j=0}^{X-1} |P_{ij} - P_{i+1,j}|$$

5. The method of claim 1 wherein said determining scene changes includes comparing a correlation value for one pseudo frame to a correlation value for an adjacent pseudo-frame multiplied by a constant.

6. The method of claim 5 wherein said adjacent pseudo-frame includes a previous pseudo-frame.

7. The method of claim 1 wherein said analyzing includes:  
selecting a set of correlation values based on whether the frame represents a new scene, a continuation of a scene, or an end of a scene; and  
comparing said selected set of correlation values to one another to identify the source of each frame in said series.

8. The method of claim 7 wherein said identification of the source of each frame includes transitioning a state machine through a series of states based on said comparison.

9. The method of claim 1 wherein said source information includes one of an interlaced field, the first field of a progressive frame, the second field of a progressive frame, the first field of a repeated field progressive frame, the second field of a repeated field progressive frame, and the third field of a repeated field progressive frame.

10. The method of claim 1 additionally comprising buffering in a delay buffer a plurality of frames prior to said forming.

11. The method of claim 10 additionally comprising outputting source information in synchronization with the output of frames from said delay buffer.

12. The method of claim 1 wherein said method is carried out in real time.

13. The method of claim 1 wherein said method is carried out off-line.

14. A method of identifying the source of materials in a video sequence, comprising:  
forming a series of pseudo frames from fields in adjacent frames;  
calculating a correlation value for each of said pseudo frames;  
determining scene changes based on said correlation values;  
identifying frames and repeated fields based on said correlation values and said scene changes; and

identifying the source of each frame in said series based on said identification of frames and repeated fields.

15. The method of claim 14 wherein said forming a series of pseudo-frames includes interleaving each field with a field from a previous frame.

16. The method of claim 14 wherein said forming a series of pseudo-frames includes interleaving each field with a previous field.

17. The method of claim 14 wherein said calculating a correlation value includes calculating a sum of absolute values of neighboring line differences according to the following formula:

$$SAD = \sum_{i=0}^{Y-2} \sum_{j=0}^{X-1} |P_{ij} - P_{i+1,j}|$$

18. The method of claim 14 wherein said determining scene changes includes comparing a correlation value for one pseudo frame to a correlation value for an adjacent pseudo-frame multiplied by a constant.

19. The method of claim 18 wherein said adjacent pseudo-frame includes a previous pseudo-frame.

20. The method of claim 14 wherein said identification of frames and repeated fields includes:

selecting a set of correlation values based on whether the frame represents a new scene, a continuation of a scene, or an end of a scene; and

comparing said selected set of correlation values to one another to identify frames and repeated fields.

21. The method of claim 14 wherein said identification of the source of each frame includes transitioning a state machine through a series of states based on said frames and repeated fields.

22. The method of claim 14 wherein said source information includes one of an interlaced field, the first field of a progressive frame, the second field of a progressive frame, the first field of a repeated field progressive frame, the second field of a repeated field progressive frame, and the third field of a repeated field progressive frame.

23. The method of claim 14 additionally comprising buffering in a delay buffer a plurality of frames prior to said forming.

24. The method of claim 23 additionally comprising outputting source information in synchronization with the output of frames from said delay buffer.

25. The method of claim 14 wherein said method is carried out in real time.

26. The method of claim 14 wherein said method is carried out off-line.

27. A computer readable medium carrying a series of instructions which, when executed, perform a method of identifying the source of materials in a video sequence, comprising:

forming a series of pseudo frames from fields in adjacent frames;

calculating a correlation value for each of said pseudo frames;

determining scene changes; and

analyzing said correlation values and said scene changes to identify the source of each frame in said series.

28. The medium of claim 27 wherein said forming a series of pseudo-frames includes interleaving each field with a field from a previous frame.

29. The medium of claim 27 wherein said forming a series of pseudo-frames includes interleaving each field with a previous field.

30. The medium of claim 27 wherein calculating a correlation value includes calculating a sum of absolute values of neighboring line differences according to the following formula:

$$SAD = \sum_{i=0}^{Y-2} \sum_{j=0}^{X-1} |P_{i,j} - P_{i+1,j}|$$

31. The medium of claim 27 wherein said determining scene changes includes comparing a correlation value for one pseudo frame to a correlation value for an adjacent pseudo-frame multiplied by a constant.

32. The medium of claim 31 wherein said adjacent pseudo-frame includes a previous pseudo-frame.

33. The medium of claim 27 wherein said analyzing includes:

selecting a set of correlation values based on whether the frame represents a new scene, a continuation of a scene, or an end of a scene; and

comparing said selected set of correlation values to one another to identify the source of each frame in said series.

34. The medium of claim 33 wherein said identification of the source of each frame includes transitioning a state machine through a series of states based on said comparison.

35. The medium of claim 27 wherein said source information includes one of an interlaced field, the first field of a progressive frame, the second field of a progressive frame, the first field of a repeated field progressive frame, the second field of a repeated field progressive frame, and the third field of a repeated field progressive frame.

36. The medium of claim 27 additionally comprising buffering in a delay buffer a plurality of frames prior to said forming.

37. The medium of claim 36 additionally comprising outputting source information in synchronization with the output of frames from said delay buffer.

38. The medium of claim 27 wherein said method is carried out in real time.

39. The medium of claim 27 wherein said method is carried out off-line.

40. A computer readable medium carrying a series of instructions which, when executed, perform a method of identifying the source of materials in a video sequence, comprising:

forming a series of pseudo frames from fields in adjacent frames;

calculating a correlation value for each of said pseudo frames;

determining scene changes based on said correlation values;

identifying frames and repeated fields based on said correlation values and said scene changes; and

identifying the source of each frame in said series based on said identification of frames and repeated fields.

41. The medium of claim 40 wherein said forming a series of pseudo-frames includes interleaving each field with a field from a previous frame.

42. The medium of claim 40 wherein said forming a series of pseudo-frames includes interleaving each field with a previous field.

43. The medium of claim 40 wherein said calculating a correlation value includes calculating a sum of absolute values of neighboring line differences according to the following formula:

$$SAD = \sum_{i=0}^{Y-2} \sum_{j=0}^{X-1} |P_{i,j} - P_{i+1,j}|$$

44. The medium of claim 40 wherein said determining scene changes includes comparing a correlation value for one pseudo frame to a correlation value for an adjacent pseudo-frame multiplied by a constant.

45. The medium of claim 44 wherein said adjacent pseudo-frame includes a previous pseudo-frame.

46. The medium of claim 40 wherein said identification of frames and repeated fields includes:

selecting a set of correlation values based on whether the frame represents a new scene, a continuation of a scene, or an end of a scene; and

comparing said selected set of correlation values to one another to identify frames and repeated fields.

47. The medium of claim 40 wherein said identification of the source of each frame includes transitioning a state machine through a series of states based on said frames and repeated fields.

48. The medium of claim 40 wherein said source information includes one of an interlaced field, the first field of a progressive frame, the second field of a progressive frame, the first field of a repeated field progressive frame, the second field of a repeated field progressive frame, and the third field of a repeated field progressive frame.

49. The medium of claim 40 additionally comprising buffering in a delay buffer a plurality of frames prior to said forming.

50. The medium of claim 49 additionally comprising outputting source information in synchronization with the output of frames from said delay buffer.

51. The medium of claim 40 wherein said method is carried out in real time.

52. The medium of claim 40 wherein said method is carried out off-line.

53. An apparatus for identifying the source of materials in a video sequence, comprising:



a first circuit for forming a series of pseudo frames from fields in adjacent frames;  
a second circuit for calculating a correlation value for each of said pseudo frames;  
a third circuit for determining scene changes; and  
an analyzer for analyzing said correlation values and said scene changes to identify the source of each frame in said series.

54. The apparatus of claim 53 wherein said first circuit forms a series of pseudo-frames by interleaving each field with a field from a previous frame.

55. The apparatus of claim 53 wherein said first circuit forms a series of pseudo-frames by interleaving each field with a previous field.

56. The apparatus of claim 53 wherein said second circuit calculates a correlation value by calculating a sum of absolute values of neighboring line differences according to the following formula:

$$SAD = \sum_{i=0}^{Y-2} \sum_{j=0}^{X-1} |P_{ij} - P_{i+1,j}|$$

57. The apparatus of claim 53 wherein said third circuit determines scene changes by comparing a correlation value for one pseudo frame to a correlation value for an adjacent pseudo-frame multiplied by a constant.

58. The apparatus of claim 57 wherein said adjacent pseudo-frame includes a previous pseudo-frame.

59. The apparatus of claim 53 wherein said analyzer:  
selects a set of correlation values based on whether the frame represents a new scene, a continuation of a scene, or an end of a scene; and  
compares said selected set of correlation values to one another to identify the source of each frame in said series.

60. The apparatus of claim 59 wherein said analyzer includes a state machine for transitioning through a series of states based on said comparison.

61. The apparatus of claim 53 wherein said source information includes one of an interlaced field, the first field of a progressive frame, the second field of a progressive frame, the first field of a repeated field progressive frame, the second field of a repeated field progressive frame, and the third field of a repeated field progressive frame.

62. The apparatus of claim 53 additionally comprising a delay buffer to which said first circuit is responsive.

63. The apparatus of claim 62 wherein said analyzer operates in synchronization with said delay buffer.

64. The apparatus of claim 53 wherein said apparatus operates in real time.

65. The apparatus of claim 53 wherein said apparatus operates off-line.

66. An apparatus for identifying the source of materials in a video sequence, comprising:

a first circuit for forming a series of pseudo frames from fields in adjacent frames;

a second circuit for calculating a correlation value for each of said pseudo frames;

a third circuit for determining scene changes based on said correlation values; and

an analyzer for identifying frames and repeated fields based on said correlation values and said scene changes and for identifying the source of each frame in said series based on said identification of frames and repeated fields.

67. The apparatus of claim 66 wherein said first circuit forms a series of pseudo-frames by interleaving each field with a field from a previous frame.

68. The apparatus of claim 66 wherein said first circuit forms a series of pseudo-frames by interleaving each field with a previous field.

69. The apparatus of claim 66 wherein said second circuit calculates a correlation value by calculating a sum of absolute values of neighboring line differences according to the following formula:

$$SAD = \sum_{i=0}^{Y-2} \sum_{j=0}^{X-1} |P_{ij} - P_{i+1,j}|$$

70. The apparatus of claim 66 wherein said third circuit determines scene changes by comparing a correlation value for one pseudo frame to a correlation value for an adjacent pseudo-frame multiplied by a constant.

71. The apparatus of claim 70 wherein said adjacent pseudo-frame includes a previous pseudo-frame.

72. The apparatus of claim 66 wherein said analyzer:

selects a set of correlation values based on whether the frame represents a new scene, a continuation of a scene, or an end of a scene; and

compares said selected set of correlation values to one another to identify frames and repeated fields.

73. The apparatus of claim 66 wherein said analyzer includes a state machine for transitioning through a series of states based on said identification of frames and repeated fields.

74. The apparatus of claim 66 wherein said source information includes one of an interlaced field, the first field of a progressive frame, the second field of a progressive frame, the first field of a repeated field progressive frame, the second field of a repeated field progressive frame, and the third field of a repeated field progressive frame.

75. The apparatus of claim 66 additionally comprising a delay buffer to which said first circuit is responsive.

76. The apparatus of claim 75 wherein said analyzer operates in synchronization with said delay buffer.

77. The apparatus of claim 66 wherein said apparatus operates in real time.

78. The apparatus of claim 66 wherein said apparatus operates off-line.

## ABSTRACT

A method and apparatus of identifying the source of materials in a video sequence is disclosed. A series of pseudo frames is formed, for example by interleaving, from fields in adjacent frames. A correlation value is calculated for each of the pseudo frames. The correlation value may be a sum of absolute difference (SAD) of luminance values of every neighboring scan line accumulated over the entire pseudo frame. Scene changes may be determined, for example, based on the correlation values. Frames and repeated fields are identified based on the correlation values and the scene changes. Finally, the source of each frame in the series is identified based on the identification of frames and repeated fields.

FIG. 1

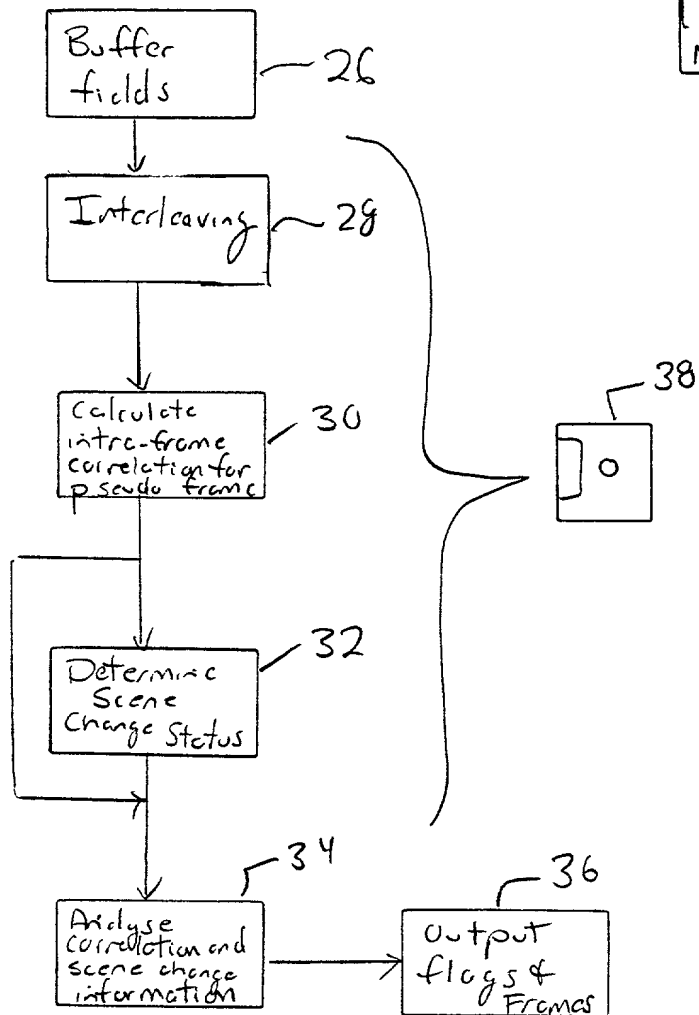
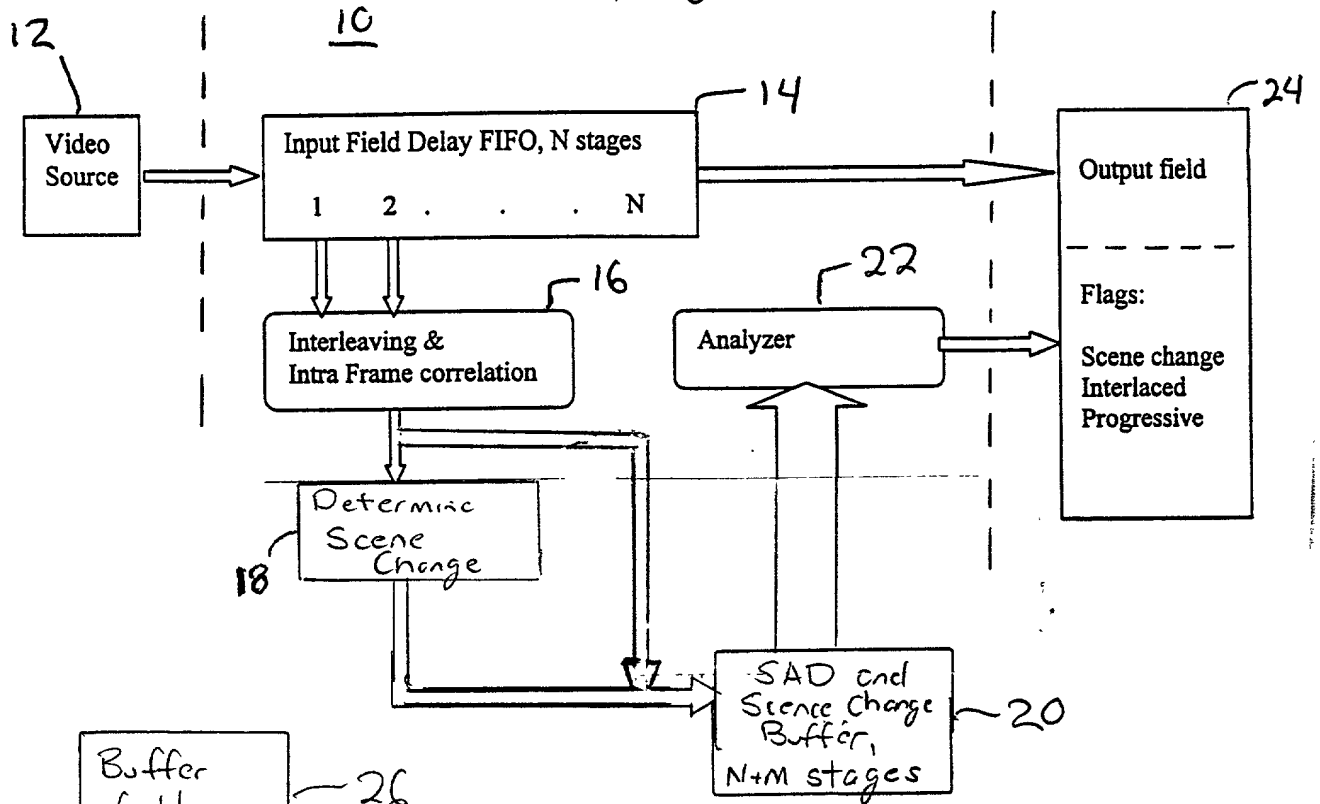


FIG. 3


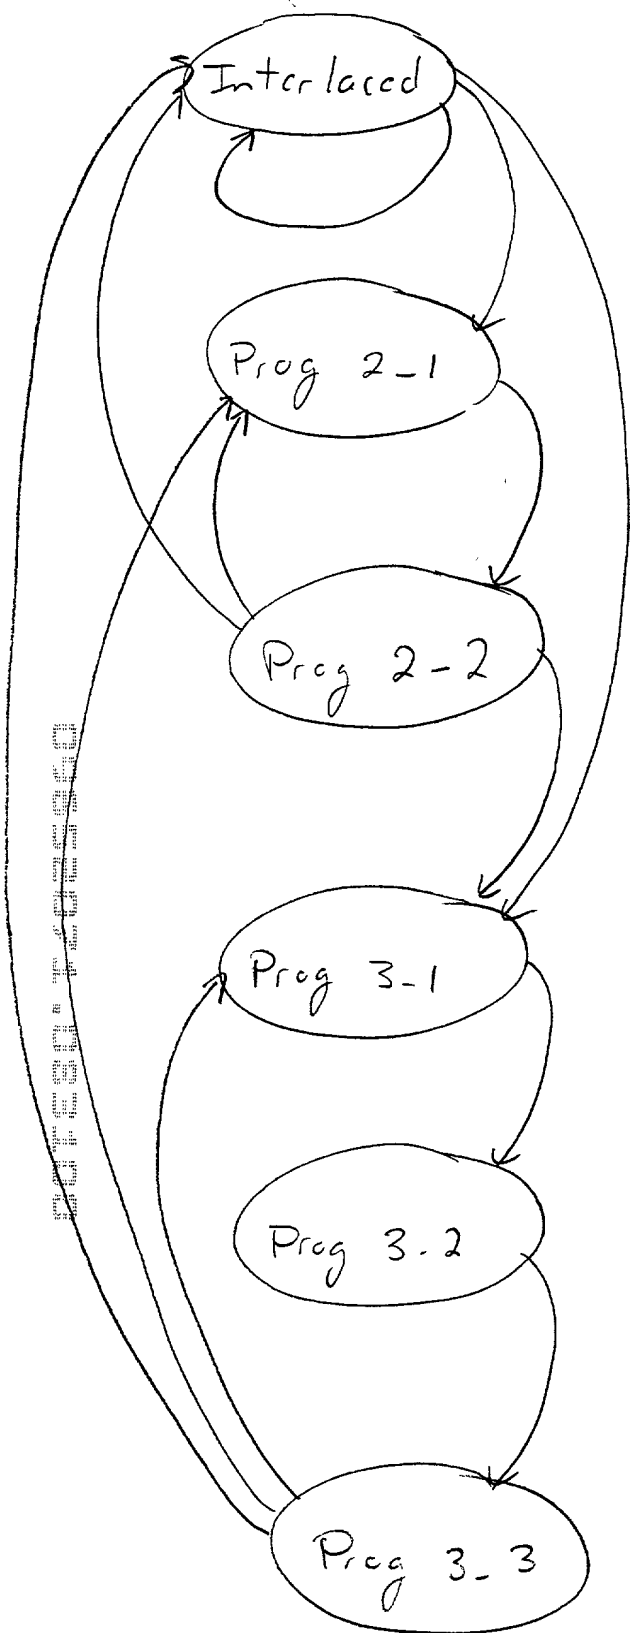


FIG. 2

FIG. 4

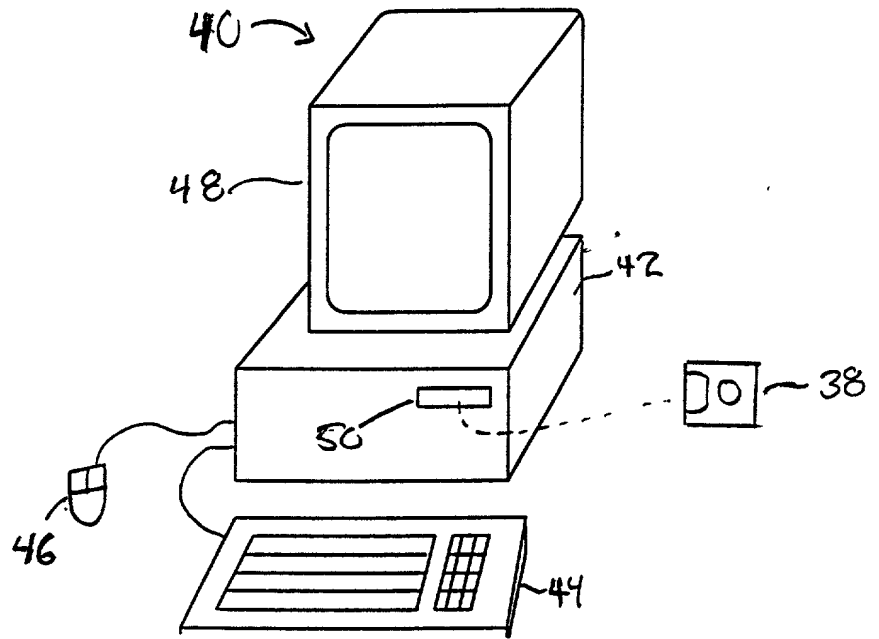

Please type a plus sign (+) inside this box → +

PTO/SB/01 (12-97)

Approved for use through 9/30/00. OMB 0651-0032

Patent and Trademark Office; U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

<b>DECLARATION FOR UTILITY OR DESIGN PATENT APPLICATION (37 CFR 1.63)</b>	<b>Attorney Docket Number</b> DB000858-000	
	<b>First Named Inventor</b> Shane Ching-Feng Hu	
	<b>COMPLETE IF KNOWN</b>	
	<b>Application Number</b>	/
	<b>Filing Date</b>	
	<b>Group Art Unit</b>	
<input checked="" type="checkbox"/> Declaration Submitted with Initial Filing	<b>OR</b>	<input type="checkbox"/> Declaration Submitted after Initial Filing (surcharge (37 CFR 1.16 (e)) required)
		<b>Examiner Name</b>

As a below named inventor, I hereby declare that:

My residence, post office address, and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

APPARATUS FOR DETECTING MIXED INTERLACED AND PROGRESSIVE  
ORIGINAL SOURCES IN A VIDEO SEQUENCE

the specification of which (Title of the Invention)

☒ is attached hereto  
OR

☐ was filed on (MM/DD/YYYY)  as United States Application Number or PCT International

Application Number  and was amended on (MM/DD/YYYY)  (if applicable).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment specifically referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. 119(a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT international application which designated at least one country other than the United States of America, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or of any PCT international application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application Number(s)	Country	Foreign Filing Date (MM/DD/YYYY)	Priority Not Claimed	Certified Copy Attached?	
				YES	NO
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
			<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

☐ Additional foreign application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto:

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application(s) listed below.

Application Number(s)	Filing Date (MM/DD/YYYY)	<input type="checkbox"/> Additional provisional application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

[Page 1 of 2]

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Washington, DC 20231.

Please type a plus sign (+) inside this box → ☐

PTO/SB/01 (12-97)  
Approved for use through 9/30/00. OMB 0651-0032  
Patent and Trademark Office, U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it contains a valid OMB control number.

## DECLARATION — Utility or Design Patent Application

I hereby claim the benefit under 35 U.S.C. 120 of any United States application(s), or 365(c) of any PCT international application designating the United States of America, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR 1.56 which became available between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. Parent Application or PCT Parent Number	Parent Filing Date (MM/DD/YYYY)	Parent Patent Number (if applicable)

☐ Additional U.S. or PCT international application numbers are listed on a supplemental priority data sheet PTO/SB/02B attached hereto.

As a named inventor, I hereby appoint the following registered practitioner(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

☐ Customer Number

OR

☐ Registered practitioner(s) name/registration number listed below

Place Customer  
Number Bar Code  
Label here

Name	Registration Number	Name	Registration Number

☐ Additional registered practitioner(s) named on supplemental Registered Practitioner Information sheet PTO/SB/02C attached hereto.


Direct all correspondence to: ☐ Customer Number  OR ☐ Correspondence address below

Name					
Address					
Address					
City		State		ZIP	
Country		Telephone		Fax	

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under 18 U.S.C. 1001 and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Name of Sole or First Inventor:

☐ A petition has been filed for this unsigned inventor

Given Name (first and middle (if any))		Family Name or Surname					
Shane Ching-Feng		Hu					
Inventor's Signature					Date	8/28/2000	
Residence: City	Beaverton	State	OR	Country	U.S.A.	Citizenship	U.S.
Post Office Address	13715 SW Hiteon Drive						
Post Office Address							
City	Beaverton	State	OR	ZIP	97008	Country	U.S.A.

☐ Additional inventors are being named on the \_\_\_\_\_ supplemental Additional Inventor(s) sheet(s) PTO/SB/02A attached hereto